


# Spesifikasi



| NO | TYPE    | SPESIFIKASI     |              |             |                   |                | DIMENSI |        |        | POWER (HP) | SPEED (mm/min) | BERAT (Kg) |
|----|---------|-----------------|--------------|-------------|-------------------|----------------|---------|--------|--------|------------|----------------|------------|
|    |         | t Plate (mm)    | L- Plat (mm) | P.Roll (mm) | Dia Top Roll (mm) | Min - Dia (mm) | P (mm)  | L (mm) | T (mm) |            |                |            |
| 1  | RP-2020 | MS 20<br>SUS 18 | 1800         | 2000        | 270               | 1000           | 3650    | 1280   | 1500   | 15         | 5935           | 4500       |
| 2  | RP-2016 | MS 16<br>SUS 14 | 1800         | 2000        | 270               | 850            | 3650    | 1280   | 1500   | 10         | 5935           | 3800       |
| 3  | RP-2014 | MS 14<br>SUS 12 | 1800         | 2000        | 270               | 500            | 3500    | 900    | 1300   | 10         | 5935           | 2400       |
| 4  | RP-2012 | MS 12<br>SUS 10 | 1800         | 2000        | 270               | 500            | 3300    | 880    | 1300   | 7,5        | 5935           | 2200       |
| 5  | RP-2010 | MS 10<br>SUS 8  | 1800         | 2000        | 216               | 500            | 3300    | 880    | 1300   | 7,5        | 4747           | 1800       |
| 6  | RP-2008 | MS 10<br>SUS 8  | 1800         | 2000        | 216               | 400            | 3300    | 880    | 1300   | 5,5        | 4747           | 1500       |

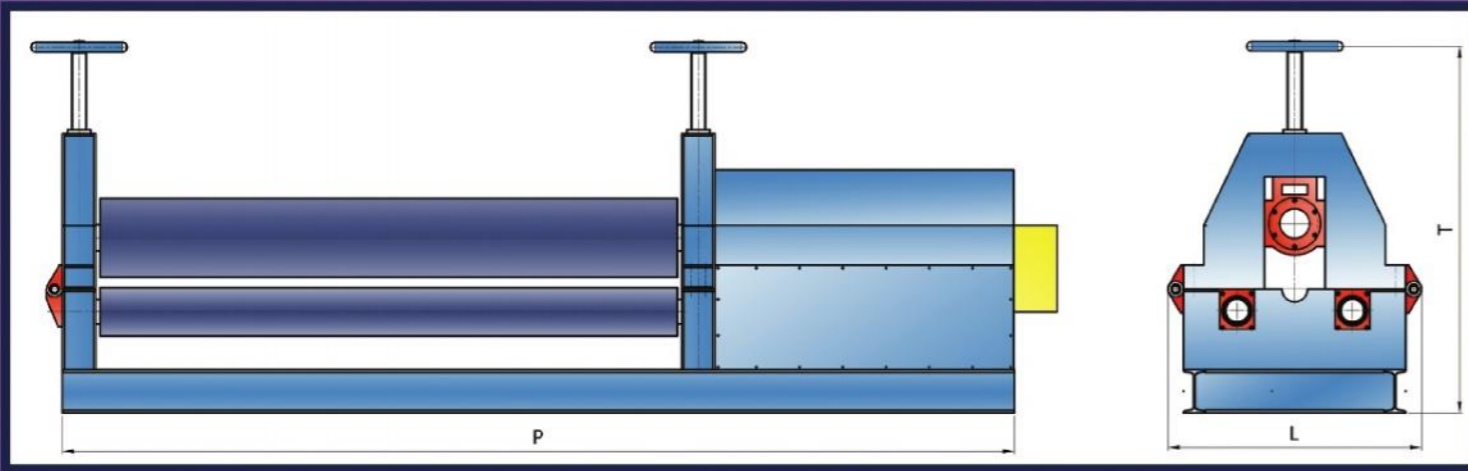


# PANCAWAHANA ROLL PLATE

Machine for roll bending plate  
Design for industrial use

## RP-SERIES

Thickness Plate :  
**8 mm - 20 mm**

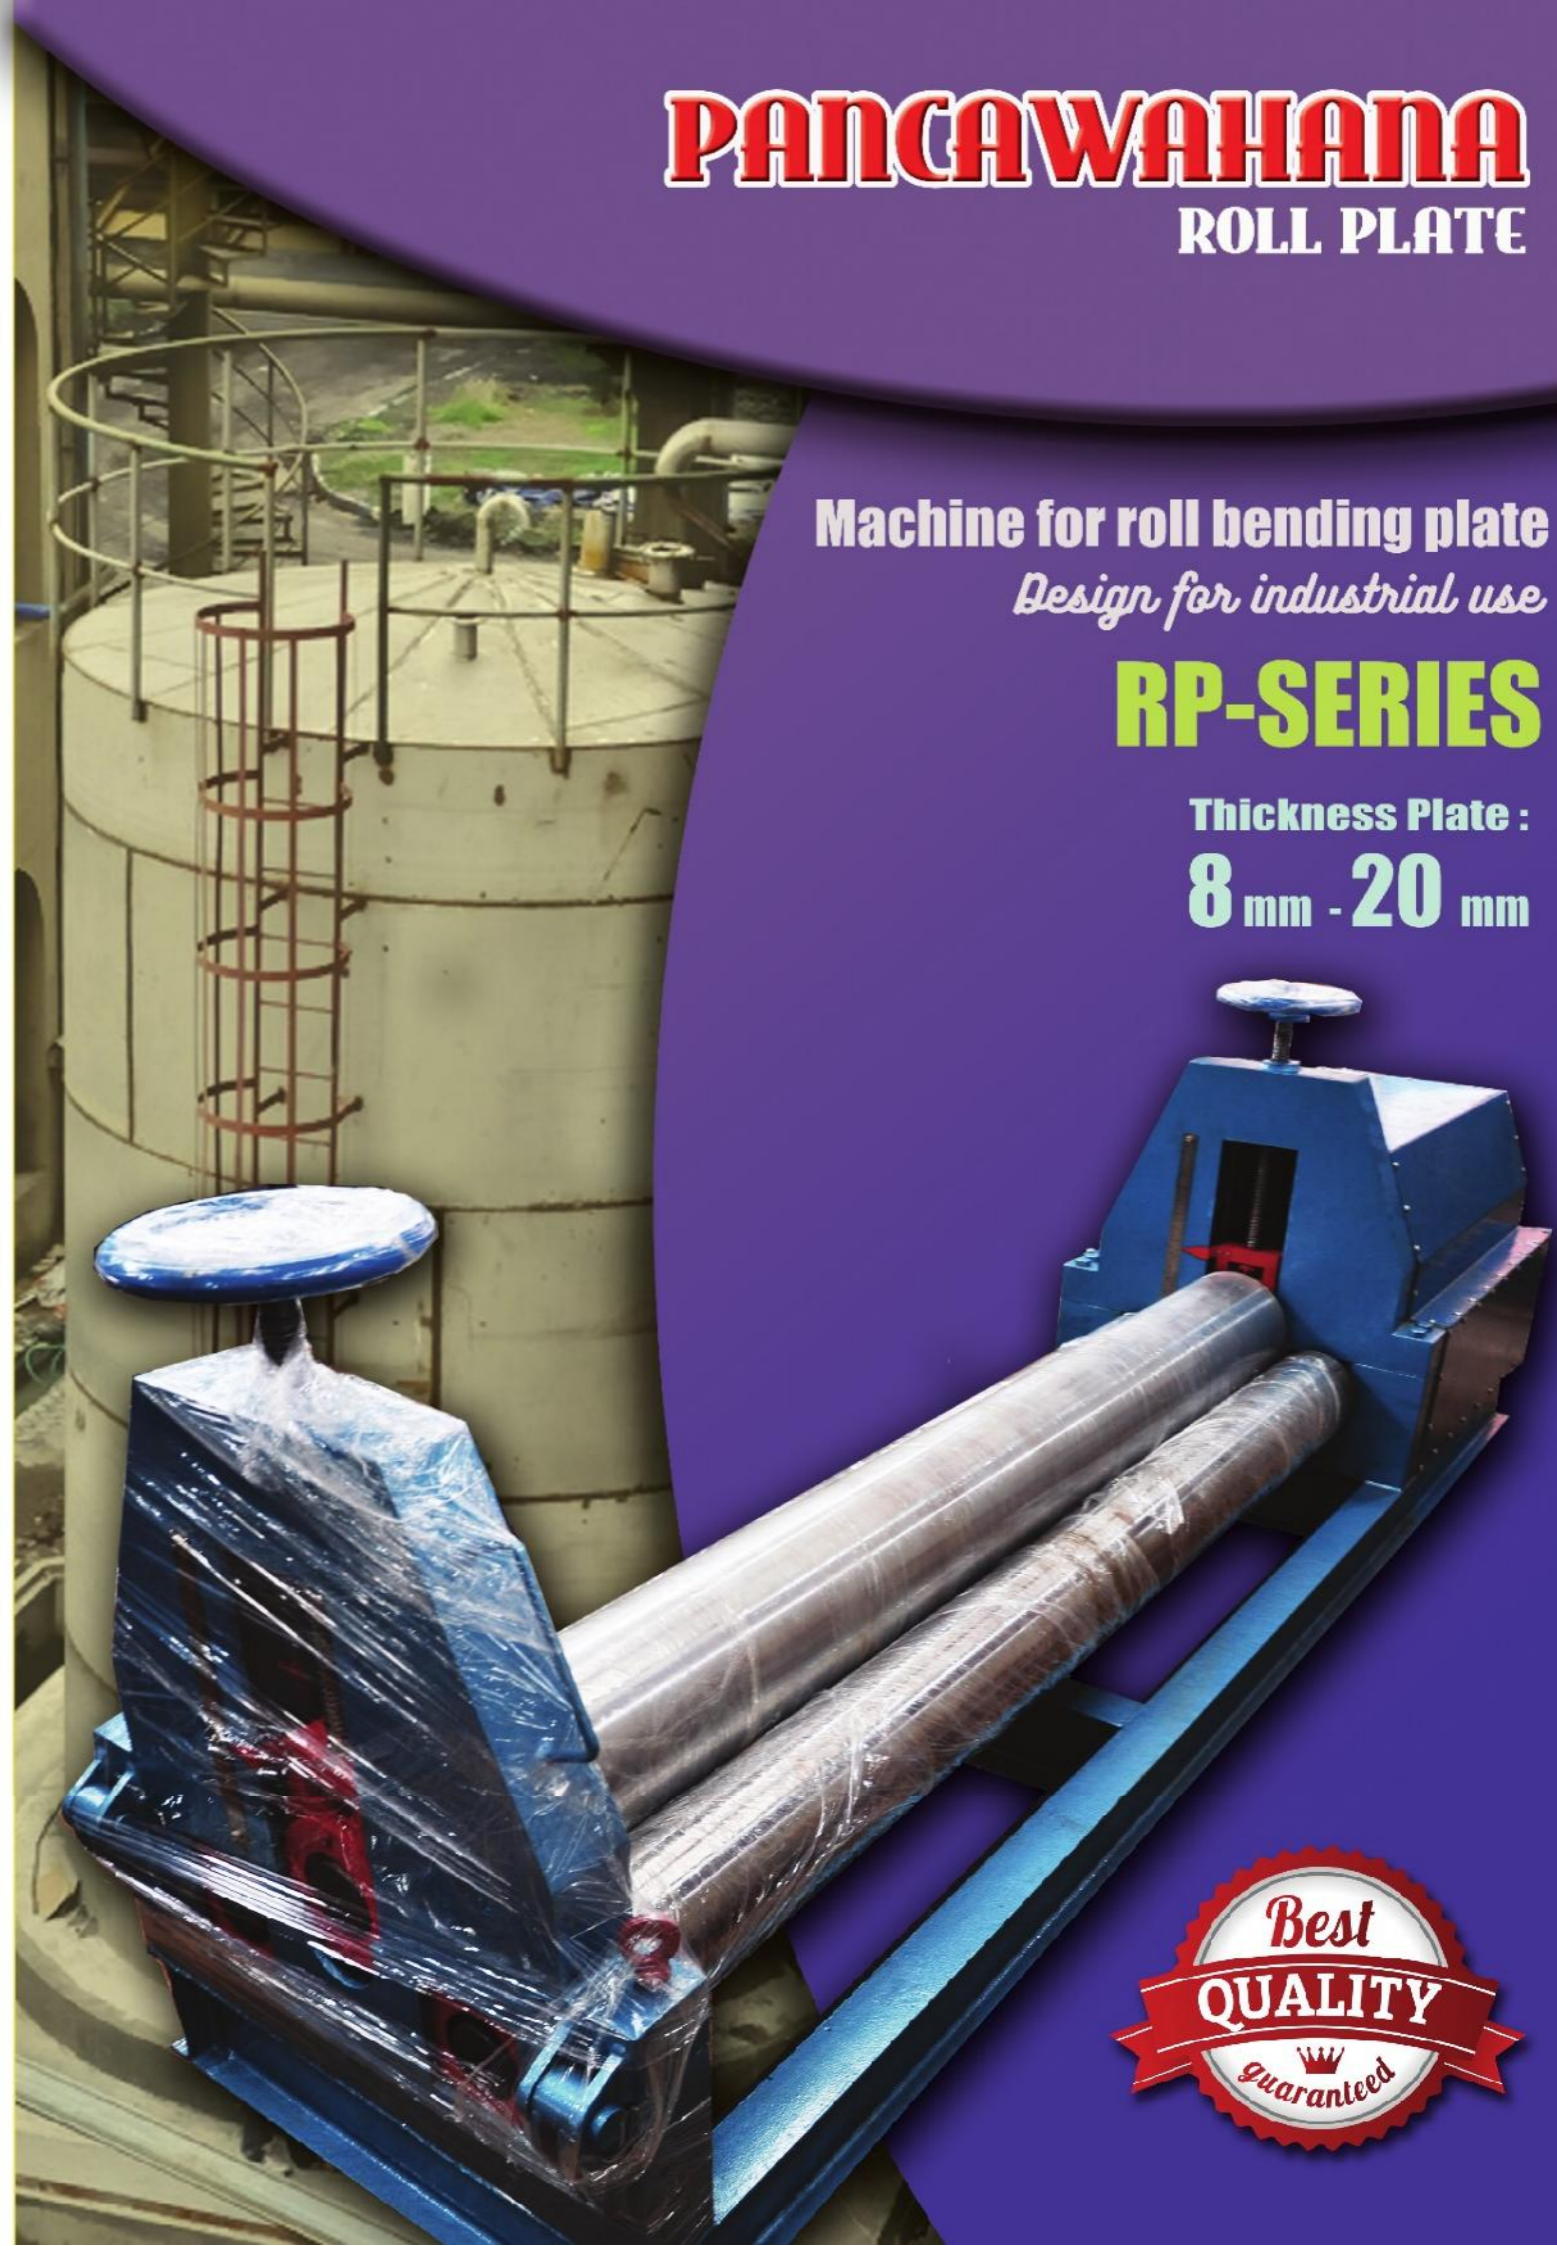


## CV. PANCA WAHANA ENGINEERING

OFFICE : RUKO BUKIT DAGO BLOK AAG NO 16 Jl. Pendidikan kel. Rawa kalong, kec. Gn Sindur - Bogor 16340  
 WORKSHOP : Jl. Pendidikan Gg. Kakaktua no.25, RT 2 / RW 11, kel. Rawa kalong kec. Gn Sindur - Bogor 16340,  
 Telp/Fax. (0251) 8615 832  
 Email : sales@panca-wahana.com  
 Web : www.panca-wahana.com


## RP-2020

|                       |  |
|-----------------------|--|
| <b>Kapasitas roll</b> | PLate th. 20 mm, SUS th. 18 mm; Lebar 2000 mm  |
| <b>Dia. Minimum</b>   | 1000 mm pada ketebalan 20 mm   |
| <b>Sistem Penekan</b> | Manual   |
| <b>Side Roller</b>    | dia. 218 mm x L = 2000 mm  |
| <b>Top Roller</b>     | dia. 270 mm x L = 2000 mm  |
| <b>Penggerak</b>      | Gearbox : Cycloidal Gear box<br>Motor : Elektro motor 15 HP, 3 phase , 380 V<br>Electrical Panel |

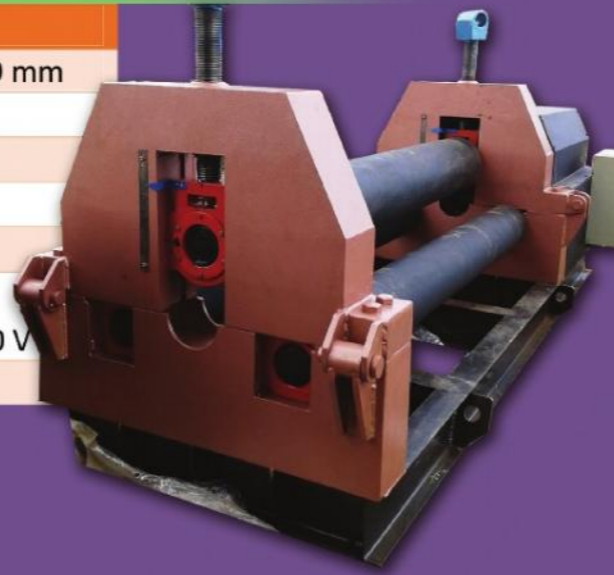


## RP-2012

|                       |   |
|-----------------------|---|
| <b>Kapasitas roll</b> | PLate th. 12 mm, SUS th. 10 mm; Lebar 2000 mm   |
| <b>Dia. Minimum</b>   | 500 mm pada ketebalan 12 mm   |
| <b>Sistem Penekan</b> | Manual  |
| <b>Side Roller</b>    | dia. 168 mm x L = 2000 mm   |
| <b>Top Roller</b>     | dia. 270 mm x L = 2000 mm   |
| <b>Penggerak</b>      | Gearbox : Cycloidal Gear box<br>Motor : Elektro motor 7,5 HP, 3 phase , 380 V<br>Electrical Panel |

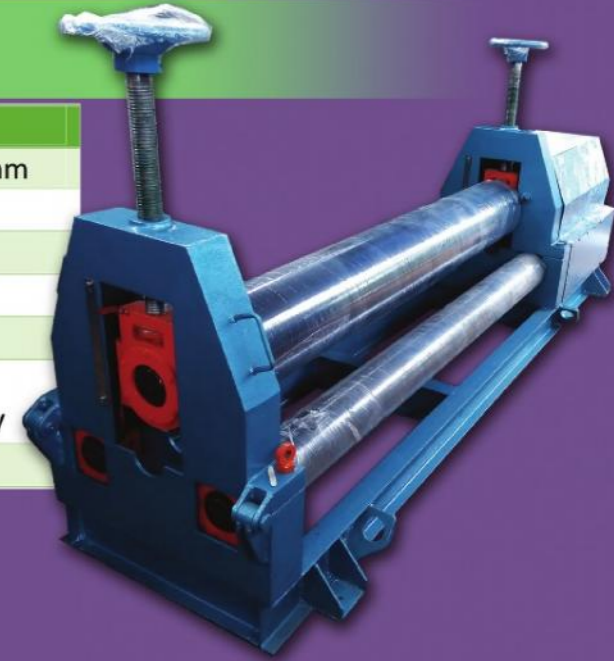

## RP-2016

|                       |  |
|-----------------------|--|
| <b>Kapasitas roll</b> | PLate th. 16 mm, SUS th. 14 mm; Lebar 2000 mm  |
| <b>Dia. Minimum</b>   | 850 mm pada ketebalan 16 mm  |
| <b>Sistem Penekan</b> | Manual   |
| <b>Side Roller</b>    | dia. 218 mm x L = 2000 mm  |
| <b>Top Roller</b>     | dia. 270 mm x L = 2000 mm  |
| <b>Penggerak</b>      | Gearbox : Cycloidal Gear box<br>Motor : Elektro motor 10 HP, 3 phase , 380 V<br>Electrical Panel |

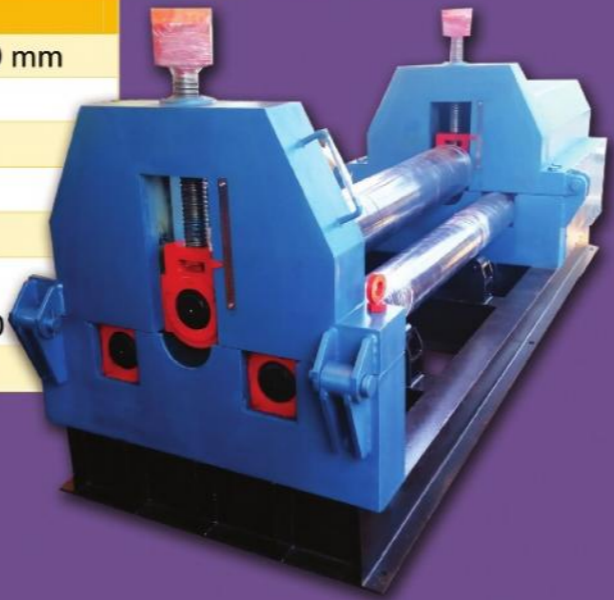


## RP-2010

|                       |  |
|-----------------------|--|
| <b>Kapasitas roll</b> | PLate th. 10 mm, SUS th. 8 mm; Lebar 2000 mm   |
| <b>Dia. Minimum</b>   | 500 mm pada ketebalan 10 mm  |
| <b>Sistem Penekan</b> | Manual   |
| <b>Side Roller</b>    | dia. 168 mm x L = 2000 mm  |
| <b>Top Roller</b>     | dia. 216 mm x L = 2000 mm  |
| <b>Penggerak</b>      | Gearbox : Worm Gear box<br>Motor : Elektro motor 7,5 HP, 3 phase , 380 V<br>Electrical Panel |



## RP-2014

|                       |  |
|-----------------------|--|
| <b>Kapasitas roll</b> | PLate th. 14 mm, SUS th. 12 mm; Lebar 2000 mm  |
| <b>Dia. Minimum</b>   | 500 mm pada ketebalan 12 mm  |
| <b>Sistem Penekan</b> | Manual   |
| <b>Side Roller</b>    | dia. 218 mm x L = 2000 mm  |
| <b>Top Roller</b>     | dia. 270 mm x L = 2000 mm  |
| <b>Penggerak</b>      | Gearbox : Cycloidal Gear box<br>Motor : Elektro motor 10 HP, 3 phase , 380 V<br>Electrical Panel |

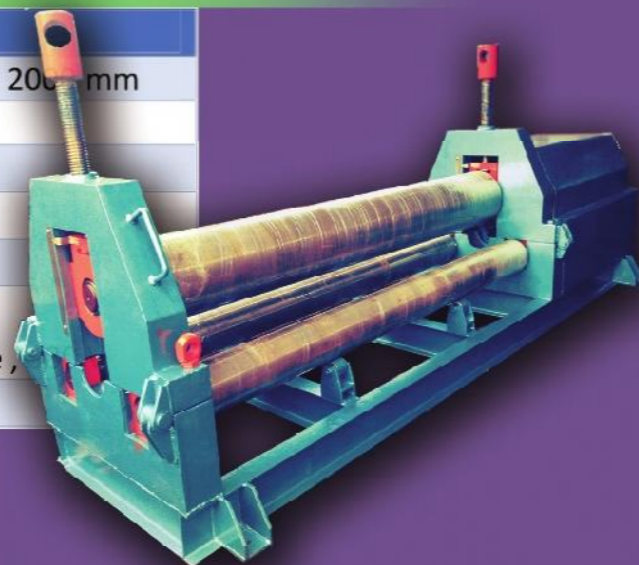

## RP-2008

|                       |  |
|-----------------------|--|
| <b>Kapasitas roll</b> | PLate th. 8 mm, SUS th. 6 mm; Lebar 2000 mm  |
| <b>Dia. Minimum</b>   | 400 mm pada ketebalan 8 mm   |
| <b>Sistem Penekan</b> | Manual   |
| <b>Side Roller</b>    | dia. 168 mm x L = 2000 mm  |
| <b>Top Roller</b>     | dia. 216 mm x L = 2000 mm  |
| <b>Penggerak</b>      | Gearbox : Worm Gear box<br>Motor : Elektro motor 5 HP, 3 phase , 380 V<br>Electrical Panel |

